



SP-LED 600W UV

POWER SUPPLY

- Input voltage: AC 90–240V, 50/60Hz
- Power consumption: 600W

LIGHT SOURCE

- High-power 600W LED output
- 60 pcs USA CREE 4-in-1 LEDs
- UV customizable light source

DIMENSIONS & WEIGHT

- Dimensions: 558 × 147 × 380 mm
- Weight: 15.5 kg

IP RATING

IP65

PRODUCT DIMENSION

558 × 147 × 380 mm

OPTICAL SYSTEM

- UV colour output
- Optional lens angles: 10°, 20°, 40°

OPERATION MODES

- DMX Control Mode
- Auto Run Mode (Jump / Fade / Pulse)
- Manual Color & UV Control
- Macro Effect Mode
- Master–Slave Operation

Scan QR Code to Learn More

Follow us on:



CONTROL & PROGRAMMING


- DMX control mode
- DMX channel modes: 4CH / 6CH / 9CH
- Auto Run mode (Jump / Fade / Pulse)
- Manual colour & UV control
- Macro effect mode
- Master-Slave operation
- RDM-enabled configuration
- Digital menu navigation
- Full-color display screen
- Digital / LCD display panel
- Multi-language interface (Chinese / English)
- Screen rotation on/off
- Screen saver on/off
- Logo display on/off

OPERATIONAL FEATURES & PERFORMANCE

- Linear dimming from 0-100%
- Adjustable RGBW current control
- Stable brightness performance
- System test function
- System information display
- Runtime and total usage time display
- Real-time temperature display

SP-LED 600W UV

DIMENSION SKETCH

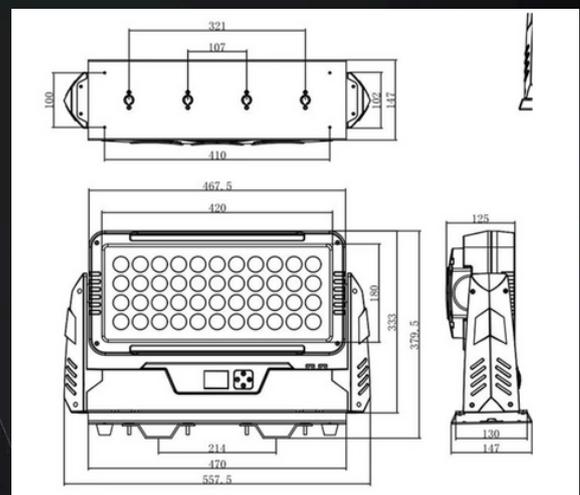

Scan QR Code to Learn More

Follow us on:

